


## PVC-U ball valve, 2-way, double union, with DIN\* flanges

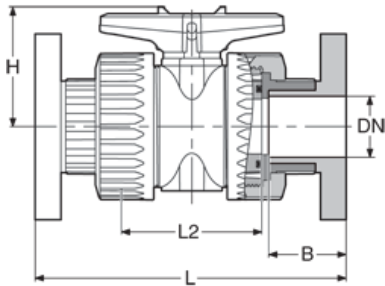

### Popis

\* DIN = EN1092-1 PN10 ANSI = ASME B16.5 Class 150 DN15 to DN50 : standard locking

## EPDM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	L2 (mm)	H (mm)	B (mm)	PN (bar)
1	20	15	1/2"	153.5	64	47.5	45	16
2	25	20	3/4"	165	64	52.5	48.5	16
3	32	25	1"	189	69	57.5	57	16
4	40	32	1"1/4	226	76.5	70	66.5	16
5	50	40	1"1/2	226	93	75	66.5	16
6	63	50	2"	253	114	82.5	69.5	16
7	75	65	2"1/2	281	116.5	92.5	82.5	10
8	90	80	3"	330	149	100	94	10
9	110	100	4"	378	175	110	101.5	10

## FPM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	L2 (mm)	H (mm)	B (mm)	PN (bar)
1	20	15	1/2"	153.5	64	47.5	45	16
2	25	20	3/4"	165	64	52.5	48.5	16
3	32	25	1"	189	69	57.5	57	16
4	40	32	1"1/4	226	76.5	70	66.5	16
5	50	40	1"1/2	226	93	75	66.5	16
6	63	50	2"	253	114	82.5	69.5	16
7	75	65	2"1/2	281	116.5	92.5	82.5	10
8	90	80	3"	330	149	100	94	10
9	110	100	4"	378	175	110	101.5	10

---

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.  
Přeloženo z originálu výrobce.

Farprosys, s.r.o.  
email: [info@farprosys.com](mailto:info@farprosys.com)  
tel. +420 728 757 770  
[www.atexventilatory.cz](http://www.atexventilatory.cz)