


PVDF kulový ventil, 2-cestný, se šroubením, s DIN* přírubami

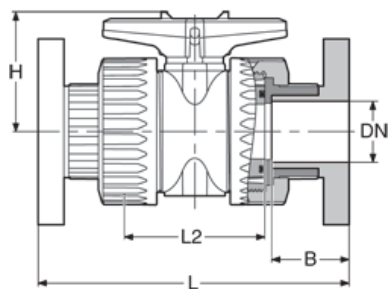

Popis

* DIN = EN1092-1 PN10 ANSI = ASME B16.5 třída 150
DN15 až DN50 : standardní zamykání

EPDM

| # | d (mm) | DN (mm) | DN (inch) | L (mm) | L2 (mm) | H (mm) | B (mm) | PN |
|---|-----------|------------|--------------|-----------|------------|-----------|-----------|----|
| 1 | 20 | 15 | 1/2" | 153 | 64 | 52 | 44.5 | 10 |
| 2 | 25 | 20 | 3/4" | 158 | 69 | 62 | 46 | 10 |
| 3 | 32 | 25 | 1" | 181 | 76.5 | 69 | 53 | 10 |
| 4 | 40 | 32 | 1"1/4 | 210 | 93 | 85 | 59 | 10 |
| 5 | 50 | 40 | 1"1/2 | 224 | 93 | 85 | 66 | 10 |
| 6 | 63 | 50 | 2" | 250 | 114 | 98 | 68 | 10 |
| 7 | 75 | 65 | 2"1/2 | 278 | 117 | 142 | 80.5 | 7 |
| 8 | 90 | 80 | 3" | 325 | 149 | 165 | 88 | 7 |
| 9 | 110 | 100 | 4" | 376 | 175 | 170 | 97.8 | 7 |

FPM

| # | d (mm) | DN (mm) | DN (inch) | L (mm) | L2 (mm) | H (mm) | B (mm) | PN |
|---|-----------|------------|--------------|-----------|------------|-----------|-----------|----|
| 1 | 20 | 15 | 1/2" | 153 | 64 | 52 | 44.5 | 10 |
| 2 | 25 | 20 | 3/4" | 158 | 69 | 62 | 46 | 10 |
| 3 | 32 | 25 | 1" | 181 | 76.5 | 69 | 53 | 10 |
| 4 | 40 | 32 | 1"1/4 | 210 | 93 | 85 | 59 | 10 |
| 5 | 50 | 40 | 1"1/2 | 224 | 93 | 85 | 66 | 10 |
| 6 | 63 | 50 | 2" | 250 | 114 | 98 | 68 | 10 |
| 7 | 75 | 65 | 2"1/2 | 278 | 117 | 142 | 80.5 | 7 |
| 8 | 90 | 80 | 3" | 325 | 149 | 165 | 88 | 7 |
| 9 | 110 | 100 | 4" | 376 | 175 | 170 | 97.8 | 7 |

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz