



## Volume control dampers standard continuous adjustment (man. operation), socket connection without graduated collar

### Popis

manual operation, socket connection, with locking screw, without graduated collar

### PVC

#	d	L	L1	L2	H1	H2	s	kg
1	0450m	525	60	405	305	260	3,6	8,0
2	0500m	530	60	410	330	285	4,0	10,0
3	0560m	-	-	-	-	-	-	-
4	0600m	600	50	500	390	335	5,0	17,0
5	0630m	-	-	-	-	-	-	-
6	0700m	700	70	560	440	385	6,0	23,0
7	0710m	-	-	-	-	-	-	-
8	0800m	800	120	560	490	435	6,3	31,0
9	0900m	900	120	660	540	485	7,0	43,0
10	1000m	1000	120	760	590	535	8,0	55,0
11	1200m	-	-	-	-	-	-	-
12	1250m	1250	120	1010	715	660	10,4	118,0

### PPs

#	d	L	L1	L2	H1	H2	s	kg
1	0450m	525	60	405	305	260	6,0	7,5
2	0500m	530	60	410	330	285	6,0	9,5
3	0560m	560	50	460	370	315	6,0	11,0
4	0600m	-	-	-	-	-	-	-
5	0630m	630	50	530	405	350	6,0	13,5
6	0700m	700	70	560	440	385	8,0	19,0
7	0710m	710	70	570	445	390	8,0	19,0
8	0800m	800	120	560	490	435	8,0	24,5
9	0900m	900	120	660	540	485	8,0	32,0
10	1000m	1000	120	760	590	535	10,0	45,0
11	1200m	-	-	-	-	-	-	-
12	1250m	1250	120	1010	715	660	10,0	80,0

## PP

#	d	L	L1	L2	H1	H2	s	kg
1	0450m	525	60	405	305	260	6,0	7,5
2	0500m	530	60	410	330	285	6,0	9,5
3	0560m	560	50	460	370	315	6,0	11,0
4	0600m	-	-	-	-	-	-	-
5	0630m	630	50	530	405	350	6,0	13,5
6	0700m	700	70	560	440	385	8,0	19,0
7	0710m	710	70	570	445	390	8,0	19,0
8	0800m	800	120	560	490	435	8,0	24,5
9	0900m	900	120	660	540	485	8,0	32,0
10	1000m	1000	120	760	590	535	10,0	45,0
11	1200m	-	-	-	-	-	-	-
12	1250m	1250	120	1010	715	660	10,0	80,0

## PE

#	d	L	L1	L2	H1	H2	s	kg
1	0450m	525	60	405	305	260	6,0	7,5
2	0500m	530	60	410	330	285	6,0	9,5
3	0560m	560	50	460	370	315	6,0	11,0
4	0600m	-	-	-	-	-	-	-
5	0630m	630	50	530	405	350	6,0	13,5
6	0700m	700	70	560	440	385	8,0	19,0
7	0710m	710	70	570	445	390	8,0	19,0
8	0800m	800	120	560	490	435	8,0	24,5
9	0900m	900	120	660	540	485	8,0	32,0
10	1000m	1000	120	760	590	535	10,0	45,0
11	1200m	-	-	-	-	-	-	-
12	1250m	1250	120	1010	715	660	10,0	80,0

## PPs-el


#	d	L	L1	L2	H1	H2	s	kg
1	0450m	525	60	405	305	260	6,0	7,5
2	0500m	530	60	410	330	285	6,0	9,5
3	0560m	560	50	460	370	315	6,0	11,0
4	0600m	-	-	-	-	-	-	-
5	0630m	630	50	530	405	350	6,0	13,5
6	0700m	700	70	560	440	385	8,0	19,0
7	0710m	710	70	570	445	390	8,0	19,0
8	0800m	800	120	560	490	435	8,0	24,5
9	0900m	900	120	660	540	485	8,0	32,0
10	1000m	1000	120	760	590	535	10,0	45,0
11	1200m	-	-	-	-	-	-	-
12	1250m	1250	120	1010	715	660	10,0	80,0

## PVDF

#	d	L	L1	L2	H1	H2	s	kg
1	0450m	525	60	405	305	260	6,0	7,5
2	0500m	530	60	410	330	285	6,0	9,5
3	0560m	560	50	460	370	315	6,0	11,0
4	0600m	-	-	-	-	-	-	-
5	0630m	630	50	530	405	350	6,0	13,5
6	0700m	700	70	560	440	385	8,0	19,0
7	0710m	710	70	570	445	390	8,0	19,0
8	0800m	800	120	560	490	435	8,0	24,5
9	0900m	900	120	660	540	485	8,0	32,0
10	1000m	1000	120	760	590	535	10,0	45,0
11	1200m	-	-	-	-	-	-	-
12	1250m	1250	120	1010	715	660	10,0	80,0

## PVC-UV

#	d	L	L1	L2	H1	H2	s	kg
1	0450m	525	60	405	305	260	3,6	8,0
2	0500m	530	60	410	330	285	4,0	10,0
3	0560m	-	-	-	-	-	-	-
4	0600m	600	50	500	390	335	5,0	17,0
5	0630m	-	-	-	-	-	-	-
6	0700m	700	70	560	440	385	6,0	23,0
7	0710m	-	-	-	-	-	-	-
8	0800m	800	120	560	490	435	6,3	31,0
9	0900m	900	120	660	540	485	7,0	43,0
10	1000m	1000	120	760	590	535	8,0	55,0
11	1200m	-	-	-	-	-	-	-
12	1250m	1250	120	1010	715	660	10,4	118,0

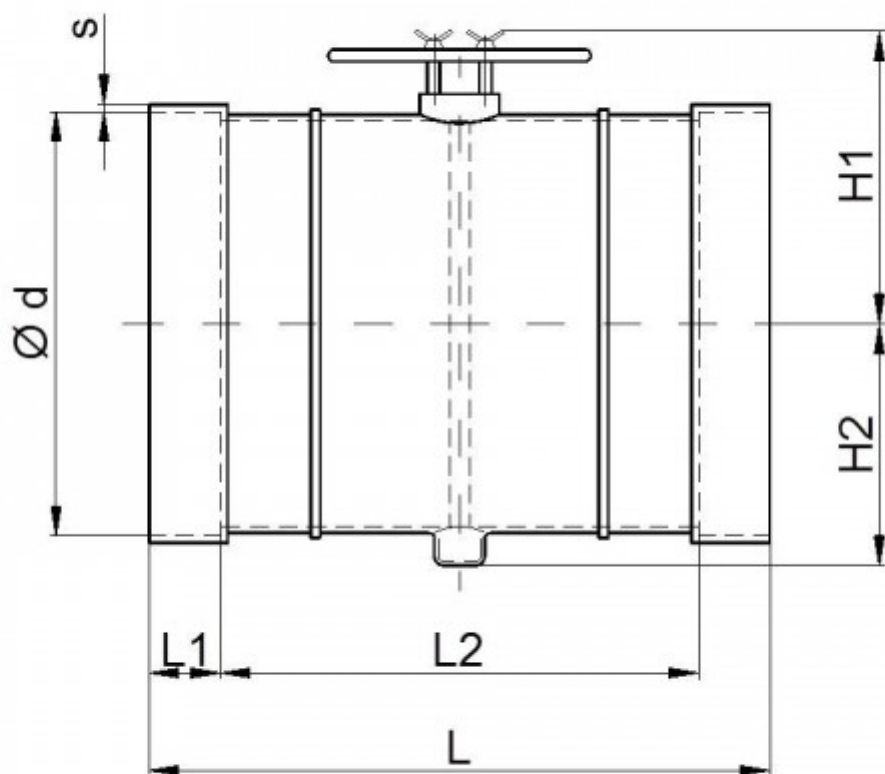

---

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.  
Přeloženo z originálu výrobce.

Farprosys, s.r.o.  
email: [info@farprosys.com](mailto:info@farprosys.com)  
tel. +420 728 757 770  
[www.atexventilatory.cz](http://www.atexventilatory.cz)