



## ANSI\* wafer PVC-U swing check valve

### Popis


\* DIN = EN1092-1 PN10 ANSI = ASME B16.5 Class 150 The dimension H is for a DIN valve. For an ANSI valve, check the product sheet.

## EPDM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	H (mm)	B (mm)	PN (bar)
1	40	32	1"1/4	15	85	18	10
2	50	40	1"1/2	16	95	22	10
3	63	50	2"	18	109	32	10
4	75	65	2"1/2	20	129	40	10
5	90	80	3"	20	144	54	10
6	110	100	4"	23	164	70	10
7	140	125	5"	23	195	92	10
8	160	150	6"	26	220	105	6
9	225	200	8"	34	275	154	6
10	280	250	10"	40	330	192	5
11	315	300	12"	45	380	227	5
12	355	350	14"	49	440	266	3
13	400	400	15"	65	491	310	3
14	450	450	16"	78	541	350	3
15	500	500	20"	78	596	400	3

## FPM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	H (mm)	B (mm)	PN (bar)
1	40	32	1"1/4	15	85	18	10
2	50	40	1"1/2	16	95	22	10
3	63	50	2"	18	109	32	10
4	75	65	2"1/2	20	129	40	10
5	90	80	3"	20	144	54	10
6	110	100	4"	23	164	70	10
7	140	125	5"	23	195	92	10
8	160	150	6"	26	220	105	6
9	225	200	8"	34	275	154	6
10	280	250	10"	40	330	192	5
11	315	300	12"	45	380	227	5
12	355	350	14"	49	440	266	3
13	400	400	15"	65	491	310	3
14	450	450	16"	78	541	350	3
15	500	500	20"	78	596	400	3

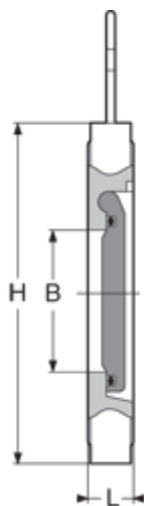

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.  
Přeloženo z originálu výrobce.

Farprosys, s.r.o.  
email: [info@farprosys.com](mailto:info@farprosys.com)  
tel. +420 728 757 770  
[www.atexventilatory.cz](http://www.atexventilatory.cz)