



## Roof passages

**Popis**  
for a flat or pitched roof

### PVC

#	d	d1	d2	axa	s
1	0075	75	63	400	4,0
2	110	110	90	400	4,0
3	125	125	110	400	4,0
4	140	140	125	450	4,0
5	160	160	140	450	4,0
6	180	180	160	500	4,0
7	200	200	180	500	40
8	225	225	200	550	4,0
9	250	250	225	550	4,0
10	280	280	250	600	6,0
11	315	315	280	650	6,0
12	355	355	315	700	6,0
13	400	400	355	750	6,0
14	450	450	400	800	8,0

## PPs

#	d	d1	d2	axa	s
1	0075	75	63	400	4,0
2	110	110	90	400	4,0
3	125	125	110	400	4,0
4	140	140	125	450	4,0
5	160	160	140	450	4,0
6	180	180	160	500	4,0
7	200	200	180	500	40
8	225	225	200	550	4,0
9	250	250	225	550	4,0
10	280	280	250	600	6,0
11	315	315	280	650	6,0
12	355	355	315	700	6,0
13	400	400	355	750	6,0
14	450	450	400	800	8,0

## PP

#	d	d1	d2	axa	s
1	0075	75	63	400	4,0
2	110	110	90	400	4,0
3	125	125	110	400	4,0
4	140	140	125	450	4,0
5	160	160	140	450	4,0
6	180	180	160	500	4,0
7	200	200	180	500	40
8	225	225	200	550	4,0
9	250	250	225	550	4,0
10	280	280	250	600	6,0
11	315	315	280	650	6,0
12	355	355	315	700	6,0
13	400	400	355	750	6,0
14	450	450	400	800	8,0

## PE

#	d	d1	d2	axa	s
1	0075	75	63	400	4,0
2	110	110	90	400	4,0
3	125	125	110	400	4,0
4	140	140	125	450	4,0
5	160	160	140	450	4,0
6	180	180	160	500	4,0
7	200	200	180	500	40
8	225	225	200	550	4,0
9	250	250	225	550	4,0
10	280	280	250	600	6,0
11	315	315	280	650	6,0
12	355	355	315	700	6,0
13	400	400	355	750	6,0
14	450	450	400	800	8,0

## PPs-el


#	d	d1	d2	axa	s
1	0075	75	63	400	4,0
2	110	110	90	400	4,0
3	125	125	110	400	4,0
4	140	140	125	450	4,0
5	160	160	140	450	4,0
6	180	180	160	500	4,0
7	200	200	180	500	40
8	225	225	200	550	4,0
9	250	250	225	550	4,0
10	280	280	250	600	6,0
11	315	315	280	650	6,0
12	355	355	315	700	6,0
13	400	400	355	750	6,0
14	450	450	400	800	8,0

## PVDF

#	d	d1	d2	axa	s
1	0075	75	63	400	4,0
2	110	110	90	400	4,0
3	125	125	110	400	4,0
4	140	140	125	450	4,0
5	160	160	140	450	4,0
6	180	180	160	500	4,0
7	200	200	180	500	40
8	225	225	200	550	4,0
9	250	250	225	550	4,0
10	280	280	250	600	6,0
11	315	315	280	650	6,0
12	355	355	315	700	6,0
13	400	400	355	750	6,0
14	450	450	400	800	8,0

## PVC-UV

#	d	d1	d2	axa	s
1	0075	75	63	400	4,0
2	110	110	90	400	4,0
3	125	125	110	400	4,0
4	140	140	125	450	4,0
5	160	160	140	450	4,0
6	180	180	160	500	4,0
7	200	200	180	500	40
8	225	225	200	550	4,0
9	250	250	225	550	4,0
10	280	280	250	600	6,0
11	315	315	280	650	6,0
12	355	355	315	700	6,0
13	400	400	355	750	6,0
14	450	450	400	800	8,0

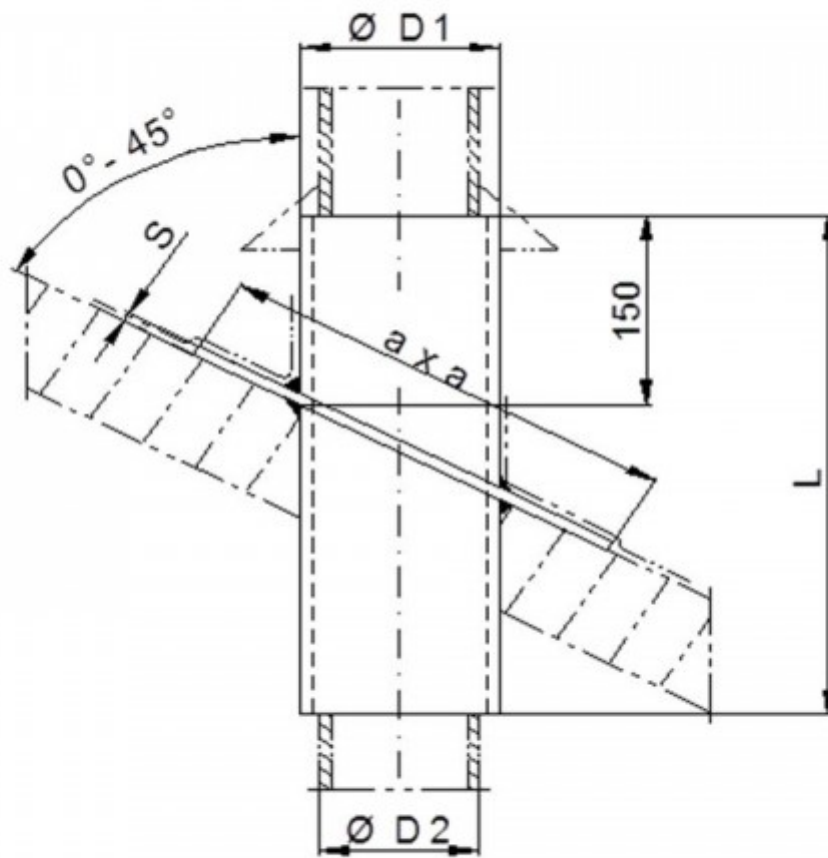

---

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.  
Přeloženo z originálu výrobce.

Farprosys, s.r.o.  
email: [info@farprosys.com](mailto:info@farprosys.com)  
tel. +420 728 757 770  
[www.atexventilatory.cz](http://www.atexventilatory.cz)