



Spherical sleeves for clip band connection

Popis

without clip band

PVC-soft

#	d	L min	L max	L1	s	kg
1	0050s	95	60	22	3	0,06
2	0063s	95	55	20	3	0,08
3	0075s	95	53	18	3	0,09
4	0090s	95	50	16	3	0,11
5	0110s	110	65	20	3	0,19
6	0125s	130	80	29	3	0,2
7	0140s	150	95	37	3	0,26
8	0160s	150	90	35	3	0,29
9	0180s	155	105	40	3	0,5
10	0200s	155	105	40	3	0,5
11	0225s	155	95	40	3	0,65
12	0250s	155	95	40	3	0,65
13	0280s	150	90	40	3	0,71
14	0315s	150	90	40	3	0,71

PP-Basis


#	d	L min	L max	L1	s	kg
1	0050s	95	60	22	3	0,07
2	0063s	95	55	20	3	0,09
3	0075s	95	53	18	3	0,17
4	0090s	95	50	16	3	0,21
5	0110s	110	65	20	3	0,22
6	0125s	130	80	29	3	0,24
7	0140s	150	95	37	3	0,3
8	0160s	150	90	35	3	0,33
9	0180s	155	105	40	3	0,57
10	0200s	155	105	40	3	0,57
11	0225s	155	95	40	3	0,74
12	0250s	155	95	40	3	0,74
13	0280s	150	90	40	3	0,82
14	0315s	150	90	40	3	0,82

PP-Basis-el

#	d	L min	L max	L1	s	kg
1	0050s	95	60	22	3	0,07
2	0063s	95	55	20	3	0,09
3	0075s	95	53	18	3	0,17
4	0090s	95	50	16	3	0,21
5	0110s	110	65	20	3	0,22
6	0125s	130	80	29	3	0,24
7	0140s	150	95	37	3	0,3
8	0160s	150	90	35	3	0,33
9	0180s	155	105	40	3	0,57
10	0200s	155	105	40	3	0,57
11	0225s	155	95	40	3	0,74
12	0250s	155	95	40	3	0,74
13	0280s	150	90	40	3	0,82
14	0315s	150	90	40	3	0,82

PVC-UV

#	d	L min	L max	L1	s	kg
1	0050s	95	60	22	3	0,06
2	0063s	95	55	20	3	0,08
3	0075s	95	53	18	3	0,09
4	0090s	95	50	16	3	0,11
5	0110s	110	65	20	3	0,19
6	0125s	130	80	29	3	0,2
7	0140s	150	95	37	3	0,26
8	0160s	150	90	35	3	0,29
9	0180s	155	105	40	3	0,5
10	0200s	155	105	40	3	0,5
11	0225s	155	95	40	3	0,65
12	0250s	155	95	40	3	0,65
13	0280s	150	90	40	3	0,71
14	0315s	150	90	40	3	0,71

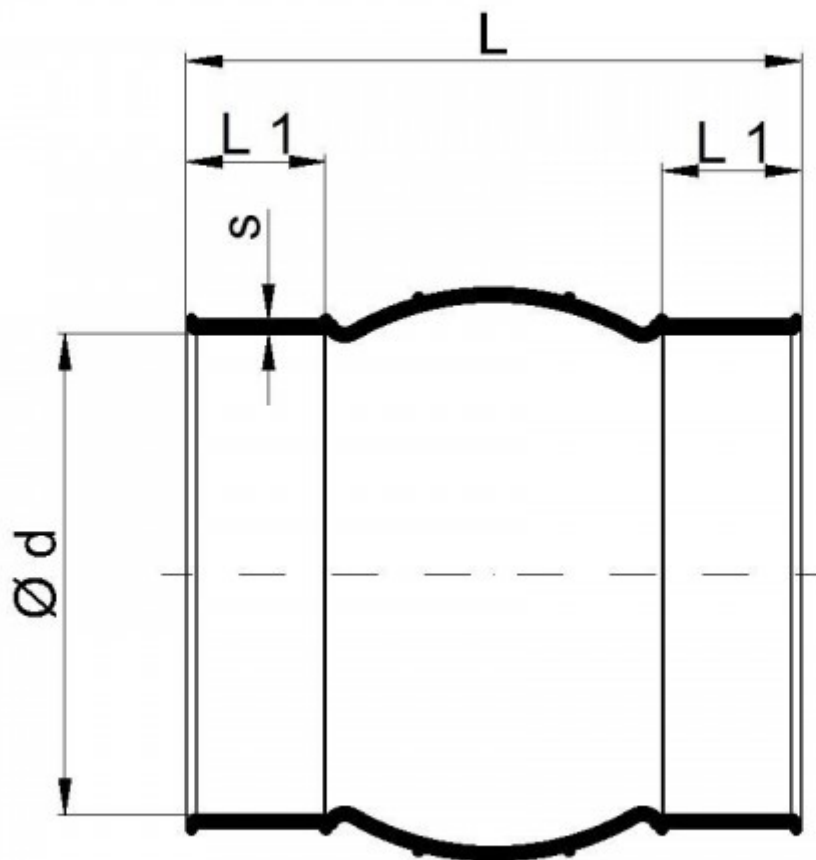

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz