

Wellflex sleeves 6 mm, fixing with clip band



Popis

corrugated, 4-fold

PVC-soft

#	d	L min	L max	L1	s
1	0450s	90	150	25	6
2	0500s	90	150	25	6
3	0560s	90	150	25	6
4	0600s	90	150	25	6
5	0630s	90	150	25	6
6	0700s	90	150	25	6
7	0710s	90	150	25	6
8	0800s	90	150	25	6
9	0900s	90	150	25	6
10	1000s	90	150	25	6
11	1250s	90	150	25	6

PP-Basis


#	d	L min	L max	L1	s
1	0450s	90	150	25	6
2	0500s	90	150	25	6
3	0560s	90	150	25	6
4	0600s	90	150	25	6
5	0630s	90	150	25	6
6	0700s	90	150	25	6
7	0710s	90	150	25	6
8	0800s	90	150	25	6
9	0900s	90	150	25	6
10	1000s	90	150	25	6
11	1250s	90	150	25	6

PP-Basis-el

#	d	L min	L max	L1	s
1	0450s	90	150	25	6
2	0500s	90	150	25	6
3	0560s	90	150	25	6
4	0600s	90	150	25	6
5	0630s	90	150	25	6
6	0700s	90	150	25	6
7	0710s	90	150	25	6
8	0800s	90	150	25	6
9	0900s	90	150	25	6
10	1000s	90	150	25	6
11	1250s	90	150	25	6

PVC-UV

#	d	L min	L max	L1	s
1	0450s	90	150	25	6
2	0500s	90	150	25	6
3	0560s	90	150	25	6
4	0600s	90	150	25	6
5	0630s	90	150	25	6
6	0700s	90	150	25	6
7	0710s	90	150	25	6
8	0800s	90	150	25	6
9	0900s	90	150	25	6
10	1000s	90	150	25	6
11	1250s	90	150	25	6

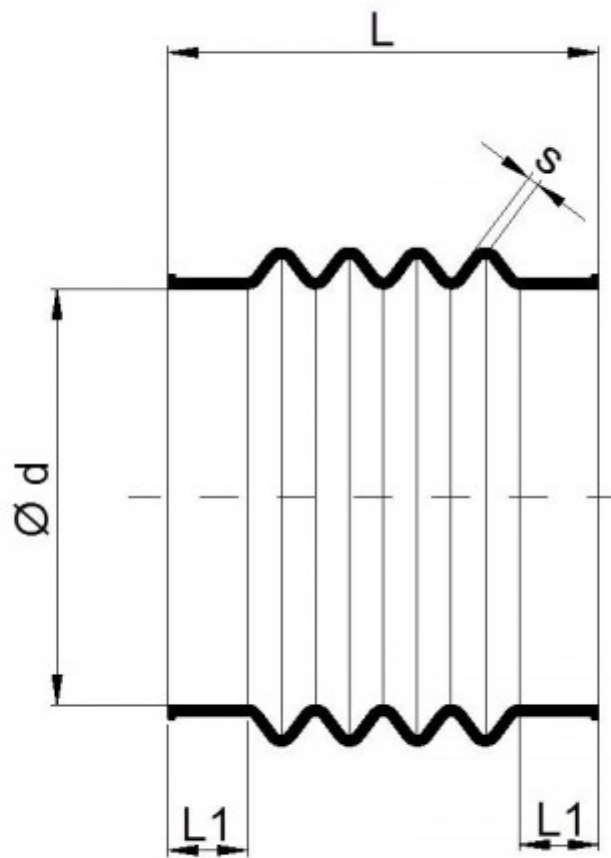

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz