

## PPGF ball valve, 2-way, DIN\* flanged compact



### Popis


\* DIN = EN1092-1 PN10 ANSI = ASME B16.5 Class 150 To order a DN65 flanged ball valve, order a DN50 valve serie 1003 with assembly of DN65 flange.

### EPDM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	H (mm)	PN (bar)
1	20	15	1/2"	130	75	10
2	25	20	3/4"	150	75	10
3	32	25	1"	160	95	10
4	40	32	1"1/4	180	99	10
5	50	40	1"1/2	200	106	10
6	63	50	2"	230	111	10

### FPM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	H (mm)	PN (bar)
1	20	15	1/2"	130	75	10
2	25	20	3/4"	150	75	10
3	32	25	1"	160	95	10
4	40	32	1"1/4	180	99	10
5	50	40	1"1/2	200	106	10
6	63	50	2"	230	111	10

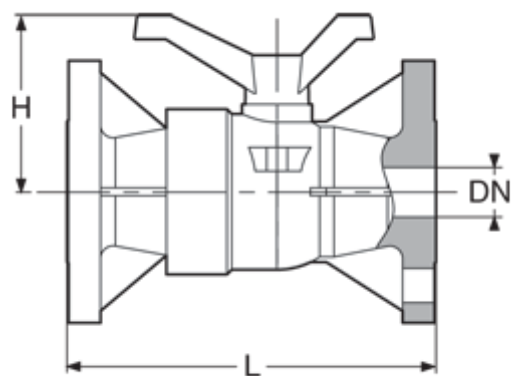

---

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.  
Přeloženo z originálu výrobce.

Farprosys, s.r.o.  
email: [info@farprosys.com](mailto:info@farprosys.com)  
tel. +420 728 757 770  
[www.atexventilatory.cz](http://www.atexventilatory.cz)