


## Volume flow sensor short, socket connection

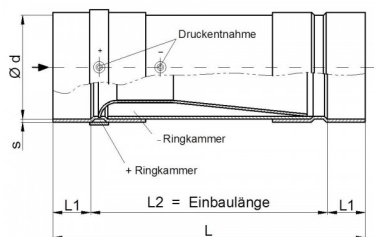

### Popis

with Venturi injector according DIN EN ISO 5167-1

## PVC

#	d	L	L1	L2	s PVC	s PP-Basis
1	0110m	270	40	190	3,0	3,5
2	0125m	300	40	220	3,0	3,5
3	0140m	320	40	240	3,0	3,5
4	0160m	360	40	280	4,0	3,5
5	0180m	380	40	300	4,0	3,5
6	0200m	420	50	320	4,0	3,5
7	0225m	480	50	380	4,0	3,5
8	0250m	580	50	480	4,0	3,5
9	0280m	540	50	440	4,0	3,5
10	0315m	600	50	500	4,0	3,5
11	0355m	650	50	550	4,0	6,0
12	0400m	750 (770)*	50 (60)*	650	4,0	6,0
13	0450m	850	50	750	4,0	6,0
14	0500m	950	50	850	4,0	6,0

## PPs

#	d	L	L1	L2	s PVC	s PP-Basis
1	0110m	270	40	190	3,0	3,5
2	0125m	300	40	220	3,0	3,5
3	0140m	320	40	240	3,0	3,5
4	0160m	360	40	280	4,0	3,5
5	0180m	380	40	300	4,0	3,5
6	0200m	420	50	320	4,0	3,5
7	0225m	480	50	380	4,0	3,5
8	0250m	580	50	480	4,0	3,5
9	0280m	540	50	440	4,0	3,5
10	0315m	600	50	500	4,0	3,5
11	0355m	650	50	550	4,0	6,0
12	0400m	750 (770)*	50 (60)*	650	4,0	6,0
13	0450m	850	50	750	4,0	6,0
14	0500m	950	50	850	4,0	6,0

## PP

#	d	L	L1	L2	s PVC	s PP-Basis
1	0110m	270	40	190	3,0	3,5
2	0125m	300	40	220	3,0	3,5
3	0140m	320	40	240	3,0	3,5
4	0160m	360	40	280	4,0	3,5
5	0180m	380	40	300	4,0	3,5
6	0200m	420	50	320	4,0	3,5
7	0225m	480	50	380	4,0	3,5
8	0250m	580	50	480	4,0	3,5
9	0280m	540	50	440	4,0	3,5
10	0315m	600	50	500	4,0	3,5
11	0355m	650	50	550	4,0	6,0
12	0400m	750 (770)*	50 (60)*	650	4,0	6,0
13	0450m	850	50	750	4,0	6,0
14	0500m	950	50	850	4,0	6,0

## PE

#	d	L	L1	L2	s PVC	s PP-Basis
1	0110m	270	40	190	3,0	3,5
2	0125m	300	40	220	3,0	3,5
3	0140m	320	40	240	3,0	3,5
4	0160m	360	40	280	4,0	3,5
5	0180m	380	40	300	4,0	3,5
6	0200m	420	50	320	4,0	3,5
7	0225m	480	50	380	4,0	3,5
8	0250m	580	50	480	4,0	3,5
9	0280m	540	50	440	4,0	3,5
10	0315m	600	50	500	4,0	3,5
11	0355m	650	50	550	4,0	6,0
12	0400m	750 (770)*	50 (60)*	650	4,0	6,0
13	0450m	850	50	750	4,0	6,0
14	0500m	950	50	850	4,0	6,0

## PPs-el

#	d	L	L1	L2	s PVC	s PP-Basis
1	0110m	270	40	190	3,0	3,5
2	0125m	300	40	220	3,0	3,5
3	0140m	320	40	240	3,0	3,5
4	0160m	360	40	280	4,0	3,5
5	0180m	380	40	300	4,0	3,5
6	0200m	420	50	320	4,0	3,5
7	0225m	480	50	380	4,0	3,5
8	0250m	580	50	480	4,0	3,5
9	0280m	540	50	440	4,0	3,5
10	0315m	600	50	500	4,0	3,5
11	0355m	650	50	550	4,0	6,0
12	0400m	750 (770)*	50 (60)*	650	4,0	6,0
13	0450m	850	50	750	4,0	6,0
14	0500m	950	50	850	4,0	6,0

## PVDF

#	d	L	L1	L2	s PVC	s PP-Basis
1	0110m	270	40	190	3,0	3,5
2	0125m	300	40	220	3,0	3,5
3	0140m	320	40	240	3,0	3,5
4	0160m	360	40	280	4,0	3,5
5	0180m	380	40	300	4,0	3,5
6	0200m	420	50	320	4,0	3,5
7	0225m	480	50	380	4,0	3,5
8	0250m	580	50	480	4,0	3,5
9	0280m	540	50	440	4,0	3,5
10	0315m	600	50	500	4,0	3,5
11	0355m	650	50	550	4,0	6,0
12	0400m	750 (770)*	50 (60)*	650	4,0	6,0
13	0450m	850	50	750	4,0	6,0
14	0500m	950	50	850	4,0	6,0

## PVC-UV

#	d	L	L1	L2	s PVC	s PP-Basis
1	0110m	270	40	190	3,0	3,5
2	0125m	300	40	220	3,0	3,5
3	0140m	320	40	240	3,0	3,5
4	0160m	360	40	280	4,0	3,5
5	0180m	380	40	300	4,0	3,5
6	0200m	420	50	320	4,0	3,5
7	0225m	480	50	380	4,0	3,5
8	0250m	580	50	480	4,0	3,5
9	0280m	540	50	440	4,0	3,5
10	0315m	600	50	500	4,0	3,5
11	0355m	650	50	550	4,0	6,0
12	0400m	750 (770)*	50 (60)*	650	4,0	6,0
13	0450m	850	50	750	4,0	6,0
14	0500m	950	50	850	4,0	6,0

---

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.  
Přeloženo z originálu výrobce.

Farprosys, s.r.o.  
email: [info@farprosys.com](mailto:info@farprosys.com)  
tel. +420 728 757 770  
[www.atexventilatory.cz](http://www.atexventilatory.cz)