

Silencers, circular, effective length 1500 MM

Popis

effective length 1500 mm

PVC

#	d	d	s	kg	d	s	kg
1	0110-15	315	3,0	15,0	315	3,0	11,0
2	0125-15	315	3,0	17,0	315	3,0	13,0
3	0140-15	355	3,0	19,0	355	3,0	14,0
4	0160-15	355	3,0	21,0	355	3,0	15,0
5	0180-15	400	3,0	24,0	400	3,0	18,0
6	0200-15	400	3,0	26,0	400	3,0	19,0
7	0225-15	450	3,0	30,0	450	4,0	22,0
8	0250-15	450	3,0	33,0	450	4,0	24,0
9	0280-15	500	3,0	37,0	500	4,0	27,0
10	0315-15	500	3,0	41,0	500	5,0	30,0
11	0355-15	600	4,0	47,0	600	5,0	34,0
12	0400-15	600	4,0	52,0	600	6,0	38,0

PPs

#	d	d	s	kg	d	s	kg
1	0110-15	315	3,0	15,0	315	3,0	11,0
2	0125-15	315	3,0	17,0	315	3,0	13,0
3	0140-15	355	3,0	19,0	355	3,0	14,0
4	0160-15	355	3,0	21,0	355	3,0	15,0
5	0180-15	400	3,0	24,0	400	3,0	18,0
6	0200-15	400	3,0	26,0	400	3,0	19,0
7	0225-15	450	3,0	30,0	450	4,0	22,0
8	0250-15	450	3,0	33,0	450	4,0	24,0
9	0280-15	500	3,0	37,0	500	4,0	27,0
10	0315-15	500	3,0	41,0	500	5,0	30,0
11	0355-15	600	4,0	47,0	600	5,0	34,0
12	0400-15	600	4,0	52,0	600	6,0	38,0

PP

#	d	d	s	kg	d	s	kg
1	0110-15	315	3,0	15,0	315	3,0	11,0
2	0125-15	315	3,0	17,0	315	3,0	13,0
3	0140-15	355	3,0	19,0	355	3,0	14,0
4	0160-15	355	3,0	21,0	355	3,0	15,0
5	0180-15	400	3,0	24,0	400	3,0	18,0
6	0200-15	400	3,0	26,0	400	3,0	19,0
7	0225-15	450	3,0	30,0	450	4,0	22,0
8	0250-15	450	3,0	33,0	450	4,0	24,0
9	0280-15	500	3,0	37,0	500	4,0	27,0
10	0315-15	500	3,0	41,0	500	5,0	30,0
11	0355-15	600	4,0	47,0	600	5,0	34,0
12	0400-15	600	4,0	52,0	600	6,0	38,0

PE

#	d	d	s	kg	d	s	kg
1	0110-15	315	3,0	15,0	315	3,0	11,0
2	0125-15	315	3,0	17,0	315	3,0	13,0
3	0140-15	355	3,0	19,0	355	3,0	14,0
4	0160-15	355	3,0	21,0	355	3,0	15,0
5	0180-15	400	3,0	24,0	400	3,0	18,0
6	0200-15	400	3,0	26,0	400	3,0	19,0
7	0225-15	450	3,0	30,0	450	4,0	22,0
8	0250-15	450	3,0	33,0	450	4,0	24,0
9	0280-15	500	3,0	37,0	500	4,0	27,0
10	0315-15	500	3,0	41,0	500	5,0	30,0
11	0355-15	600	4,0	47,0	600	5,0	34,0
12	0400-15	600	4,0	52,0	600	6,0	38,0


PVDF

#	d	d	s	kg	d	s	kg
1	0110-15	315	3,0	15,0	315	3,0	11,0
2	0125-15	315	3,0	17,0	315	3,0	13,0
3	0140-15	355	3,0	19,0	355	3,0	14,0
4	0160-15	355	3,0	21,0	355	3,0	15,0
5	0180-15	400	3,0	24,0	400	3,0	18,0
6	0200-15	400	3,0	26,0	400	3,0	19,0
7	0225-15	450	3,0	30,0	450	4,0	22,0
8	0250-15	450	3,0	33,0	450	4,0	24,0
9	0280-15	500	3,0	37,0	500	4,0	27,0
10	0315-15	500	3,0	41,0	500	5,0	30,0
11	0355-15	600	4,0	47,0	600	5,0	34,0
12	0400-15	600	4,0	52,0	600	6,0	38,0

PVC-UV

#	d	d	s	kg	d	s	kg
1	0110-15	315	3,0	15,0	315	3,0	11,0
2	0125-15	315	3,0	17,0	315	3,0	13,0
3	0140-15	355	3,0	19,0	355	3,0	14,0
4	0160-15	355	3,0	21,0	355	3,0	15,0
5	0180-15	400	3,0	24,0	400	3,0	18,0
6	0200-15	400	3,0	26,0	400	3,0	19,0
7	0225-15	450	3,0	30,0	450	4,0	22,0
8	0250-15	450	3,0	33,0	450	4,0	24,0
9	0280-15	500	3,0	37,0	500	4,0	27,0
10	0315-15	500	3,0	41,0	500	5,0	30,0
11	0355-15	600	4,0	47,0	600	5,0	34,0
12	0400-15	600	4,0	52,0	600	6,0	38,0



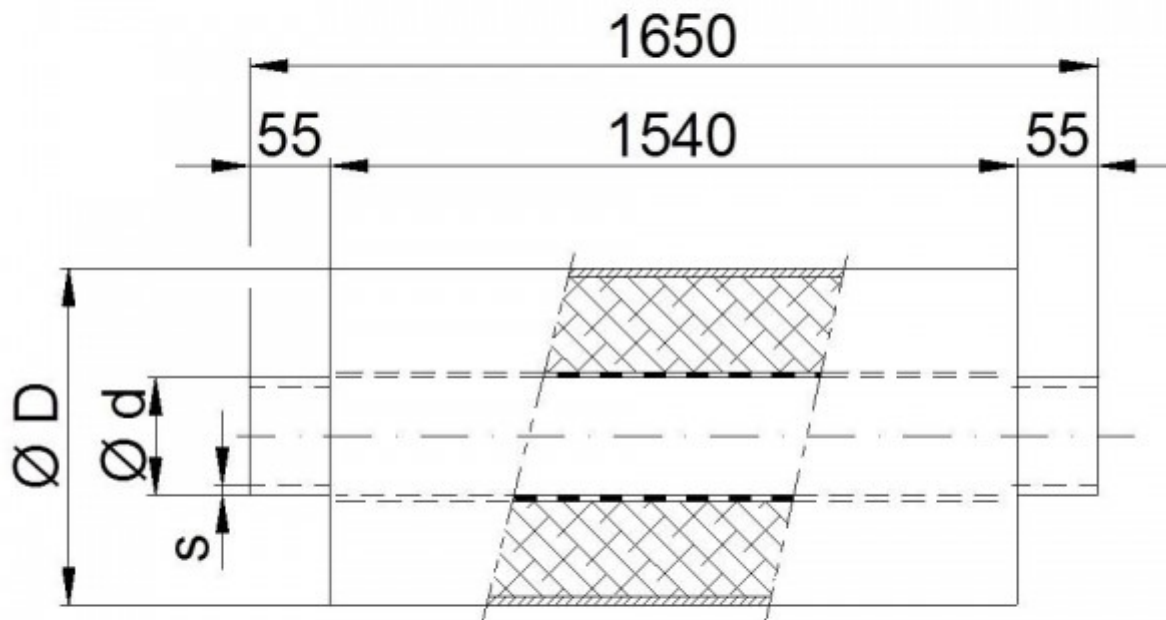

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz