

## PVC-C swing check valve, with DIN\* flanges



### Popis


\* DIN = EN1092-1 PN10 ANSI = ASME B16.5 Class 150 \*\* PN10 : consult us

### EPDM

| # | d<br>(mm) | DN<br>(mm) | DN<br>(inch) | L<br>(mm) | H<br>(mm) | C<br>(mm) | PN<br>(bar) |
|---|-----------|------------|--------------|-----------|-----------|-----------|-------------|
| 1 | 32        | 25         | 1"           | 160       | 129       | 25        | 6           |
| 2 | 50        | 40         | 1"1/2        | 180       | 141       | 41        | 6           |
| 3 | 63        | 50         | 2"           | 200       | 165       | 52        | 6           |
| 4 | 75        | 65         | 2"1/2        | 260       | 180       | 80        | 6           |
| 5 | 90        | 80         | 3"           | 260       | 180       | 80        | 6           |
| 6 | 110       | 100        | 4"           | 300       | 216       | 100       | 5           |
| 7 | 140       | 125        | 5"           | 350       | 239.5     | 125       | 5           |
| 8 | 160       | 150        | 6"           | 400       | 273       | 150       | 4           |
| 9 | 225       | 200        | 8"           | 500       | 310       | 200       | 3           |

### FPM

| # | d<br>(mm) | DN<br>(mm) | DN<br>(inch) | L<br>(mm) | H<br>(mm) | C<br>(mm) | PN<br>(bar) |
|---|-----------|------------|--------------|-----------|-----------|-----------|-------------|
| 1 | 32        | 25         | 1"           | 160       | 129       | 25        | 6           |
| 2 | 50        | 40         | 1"1/2        | 180       | 141       | 41        | 6           |
| 3 | 63        | 50         | 2"           | 200       | 165       | 52        | 6           |
| 4 | 75        | 65         | 2"1/2        | 260       | 180       | 80        | 6           |
| 5 | 90        | 80         | 3"           | 260       | 180       | 80        | 6           |
| 6 | 110       | 100        | 4"           | 300       | 216       | 100       | 5           |
| 7 | 140       | 125        | 5"           | 350       | 239.5     | 125       | 5           |
| 8 | 160       | 150        | 6"           | 400       | 273       | 150       | 4           |
| 9 | 225       | 200        | 8"           | 500       | 310       | 200       | 3           |

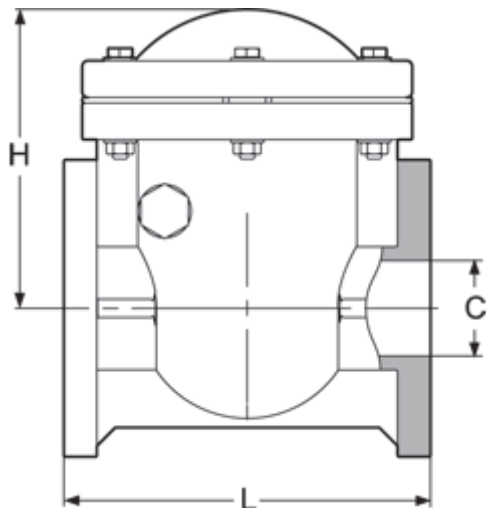

---

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.  
Přeloženo z originálu výrobce.

Farprosys, s.r.o.  
email: [info@farprosys.com](mailto:info@farprosys.com)  
tel. +420 728 757 770  
[www.atexventilatory.cz](http://www.atexventilatory.cz)