


Volume flow controller standard, socket connection

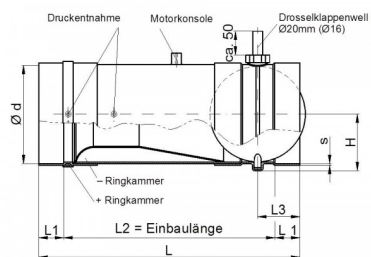

Popis

with Venturi injector according to DIN EN ISO 5167-1

PVC

#	d	L	L1	L2	L3	H	s PVC	s PP-Basis
1	0110m	400	40	320	73	71	3,0	3,5
2	0125m	400	40	320	73	79	3,0	3,5
3	0140m	400	40	320	73	86	3,0	3,5
4	0160m	530	40	450	73	96	4,0	3,5
5	0180m	590	50	490	85	106	4,0	3,5
6	0200m	610	50	510	85	116	4,0	3,5
7	0225m	800	50	700	85	129	4,0	3,5
8	0250m	800	50	700	85	141	4,0	3,5
9	0280m	860	50	760	85	156	4,0	3,5
10	0315m	860	50	760	85	174	4,0	3,5
11	0355m	1150	50	1050	200	203	4,0	6,0
12	0400m	1200	50	1100	200	225	4,0	6,0
13	0450m	1390	70	1250	250	259	5,0	6,0
14	0500m	1540	70	1400	280	284	5,0	6,0

PPs

#	d	L	L1	L2	L3	H	s PVC	s PP-Basis
1	0110m	400	40	320	73	71	3,0	3,5
2	0125m	400	40	320	73	79	3,0	3,5
3	0140m	400	40	320	73	86	3,0	3,5
4	0160m	530	40	450	73	96	4,0	3,5
5	0180m	590	50	490	85	106	4,0	3,5
6	0200m	610	50	510	85	116	4,0	3,5
7	0225m	800	50	700	85	129	4,0	3,5
8	0250m	800	50	700	85	141	4,0	3,5
9	0280m	860	50	760	85	156	4,0	3,5
10	0315m	860	50	760	85	174	4,0	3,5
11	0355m	1150	50	1050	200	203	4,0	6,0
12	0400m	1200	50	1100	200	225	4,0	6,0
13	0450m	1390	70	1250	250	259	5,0	6,0
14	0500m	1540	70	1400	280	284	5,0	6,0

PP

#	d	L	L1	L2	L3	H	s PVC	s PP-Basis
1	0110m	400	40	320	73	71	3,0	3,5
2	0125m	400	40	320	73	79	3,0	3,5
3	0140m	400	40	320	73	86	3,0	3,5
4	0160m	530	40	450	73	96	4,0	3,5
5	0180m	590	50	490	85	106	4,0	3,5
6	0200m	610	50	510	85	116	4,0	3,5
7	0225m	800	50	700	85	129	4,0	3,5
8	0250m	800	50	700	85	141	4,0	3,5
9	0280m	860	50	760	85	156	4,0	3,5
10	0315m	860	50	760	85	174	4,0	3,5
11	0355m	1150	50	1050	200	203	4,0	6,0
12	0400m	1200	50	1100	200	225	4,0	6,0
13	0450m	1390	70	1250	250	259	5,0	6,0
14	0500m	1540	70	1400	280	284	5,0	6,0

PE

#	d	L	L1	L2	L3	H	s PVC	s PP-Basis
1	0110m	400	40	320	73	71	3,0	3,5
2	0125m	400	40	320	73	79	3,0	3,5
3	0140m	400	40	320	73	86	3,0	3,5
4	0160m	530	40	450	73	96	4,0	3,5
5	0180m	590	50	490	85	106	4,0	3,5
6	0200m	610	50	510	85	116	4,0	3,5
7	0225m	800	50	700	85	129	4,0	3,5
8	0250m	800	50	700	85	141	4,0	3,5
9	0280m	860	50	760	85	156	4,0	3,5
10	0315m	860	50	760	85	174	4,0	3,5
11	0355m	1150	50	1050	200	203	4,0	6,0
12	0400m	1200	50	1100	200	225	4,0	6,0
13	0450m	1390	70	1250	250	259	5,0	6,0
14	0500m	1540	70	1400	280	284	5,0	6,0

PPs-el

#	d	L	L1	L2	L3	H	s PVC	s PP-Basis
1	0110m	400	40	320	73	71	3,0	3,5
2	0125m	400	40	320	73	79	3,0	3,5
3	0140m	400	40	320	73	86	3,0	3,5
4	0160m	530	40	450	73	96	4,0	3,5
5	0180m	590	50	490	85	106	4,0	3,5
6	0200m	610	50	510	85	116	4,0	3,5
7	0225m	800	50	700	85	129	4,0	3,5
8	0250m	800	50	700	85	141	4,0	3,5
9	0280m	860	50	760	85	156	4,0	3,5
10	0315m	860	50	760	85	174	4,0	3,5
11	0355m	1150	50	1050	200	203	4,0	6,0
12	0400m	1200	50	1100	200	225	4,0	6,0
13	0450m	1390	70	1250	250	259	5,0	6,0
14	0500m	1540	70	1400	280	284	5,0	6,0

PVDF

#	d	L	L1	L2	L3	H	s PVC	s PP-Basis
1	0110m	400	40	320	73	71	3,0	3,5
2	0125m	400	40	320	73	79	3,0	3,5
3	0140m	400	40	320	73	86	3,0	3,5
4	0160m	530	40	450	73	96	4,0	3,5
5	0180m	590	50	490	85	106	4,0	3,5
6	0200m	610	50	510	85	116	4,0	3,5
7	0225m	800	50	700	85	129	4,0	3,5
8	0250m	800	50	700	85	141	4,0	3,5
9	0280m	860	50	760	85	156	4,0	3,5
10	0315m	860	50	760	85	174	4,0	3,5
11	0355m	1150	50	1050	200	203	4,0	6,0
12	0400m	1200	50	1100	200	225	4,0	6,0
13	0450m	1390	70	1250	250	259	5,0	6,0
14	0500m	1540	70	1400	280	284	5,0	6,0

PVC-UV

#	d	L	L1	L2	L3	H	s PVC	s PP-Basis
1	0110m	400	40	320	73	71	3,0	3,5
2	0125m	400	40	320	73	79	3,0	3,5
3	0140m	400	40	320	73	86	3,0	3,5
4	0160m	530	40	450	73	96	4,0	3,5
5	0180m	590	50	490	85	106	4,0	3,5
6	0200m	610	50	510	85	116	4,0	3,5
7	0225m	800	50	700	85	129	4,0	3,5
8	0250m	800	50	700	85	141	4,0	3,5
9	0280m	860	50	760	85	156	4,0	3,5
10	0315m	860	50	760	85	174	4,0	3,5
11	0355m	1150	50	1050	200	203	4,0	6,0
12	0400m	1200	50	1100	200	225	4,0	6,0
13	0450m	1390	70	1250	250	259	5,0	6,0
14	0500m	1540	70	1400	280	284	5,0	6,0

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz